Printing configuration

Printead

Industrial printhead

Resolution

≥360*280dpi

Efficiency

CMYK / CMYK+2W

360*280dpi,max 2.2m/s;

360*280dpi,max 1.6m/s; 360*360dpi,max 1.3m/s;

Printing width

580mm-2500mm (can be customized)

Ink type

Special water-based pigment ink

Ink color

Cyan, Magenta, Yellow, Black, White (optional)

Ink supply

Automatic ink supply

Operation system

Professional RIP system, professional printing system,

Win10/11 system with 64 bit operating system or above

Input format

JPG、JPEG、PDF、DXF、EPS、TIF、TIFF、BMP、AI、etc.

Printing material

Application

All kinds of corrugated cardboard (yellow and white cattle board, honeycomb board, etc.), available to print semi-coated board with dryer

Max width

1800mm-2500mm (can be customized)

Min width

400mm

Max length

2400mm under auto feeding, 4500mm under manual feeding

Min length

420mm

Thickness

1.2mm - 20mm

Feeding system

Automatic leading edge feeding, suction platform

Slotting unit

(A)Size

350-no limit

(B)Size

150mm-1600mm

(S)Max Size 370mm


(L+W)Min Size

Material Thickness

≦10mm

Stitching Flap Szie

Slotting Thickness 1.5mm-10mm

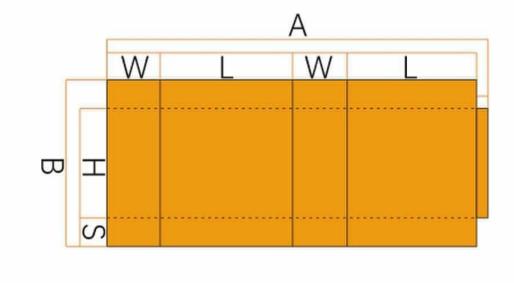

Working environment

Workplace Requirements

Install compartment

Temperature

20°C-25°C

Humidity 50%-70%

Power supply

AC380±10%, 50-60HZ

Air supply

6kg-8kg **Power**

About 70KW

Machine size

15000mm×6400mm×2453m (Please refer to the actual order)

Machine weight

Whole Line

29500KGS

Optional

Variable data, ERP docking port

Voltage stabilizer

The voltage stabilizer needs to be self-configured, request



Shenzhen Wonder Digital Technology Co.,Ltd

101,No. 7 Fengshun Road,Baolong Street,Longgang District,Shenzhen,China

Tel: 0755-28703212 Fax: 0755-89386011

Web: www.wonderjet.net



Wechat official account



Tik Top: WonderJet



Wechat Channel





WD200J

High-Density Digital Line with Vertical Slotting



friendly









available



WONDER | Professional Manufacturer of Digital Printer